

# Installation Instructions

## 安裝說明書

FR. LOWER ADJUSTABLE BALLJOINT

前下可調和尚頭


#Q0291/Q0302

### Application 適用車型

Honda Civic CR-V '17-present

### Components 內含配件

① Adjustable ball joint 可調和尚頭	2pcs
② Washer plate 固定鐵片	2pcs
③ Bolt 螺絲 (M12x1.25x32)	6pcs
④ Nut 螺帽 (M12x1.25-19x12)	6pcs
⑤ Nut 螺帽 (M14x1.5-19x14)	2pcs
⑥ Cotter pin 開口銷	2pcs

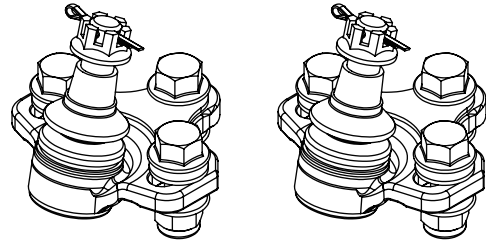

### Caution 注意事項

- Installation is recommended to be performed by licensed mechanics with necessary tools to ensure proper installation and safety, or damage to the product or vehicle may occur.
- Note the routing and position of wires and cables before installation. Please refer to factory manual.
- Tighten bolts and nuts firmly using handtools, or with specified torque if mentioned.
- 安裝需由合格的專業技師及工具執行以確保安裝正確及安全。否則可能對產品或車輛造成傷害。
- 安裝前請記下線路安裝路徑及位置。或請參考原廠手冊。
- 請使用手動工具確實鎖緊螺帽及螺絲。或依照說明中標註的扭力上鎖。

### Instructions 安裝說明

1. Remove the factory lower ball joints from lower control arms.  
將原廠和尚頭從前下控制臂上卸下。

2. Install adjustable ball joints to the control arms. Adjust the ball joints to desired camber setting, then install supplied M12 bolts, nuts and washer plates to secure the ball joints.  
(See figure 2)

將可調和尚頭安裝於前下控制臂並調整位置以達到理想的外傾角/負外傾角設定。  
完成後使用配件M12螺絲、螺帽及固定鐵片將和尚頭固定。  
(參考圖表二)

3. Please have the vehicle professionally aligned after installation.  
請於安裝中完成後接受電腦四輪定位校正。

Illustration of installed state  
安裝完成示意圖

